



Recessed Roller Placement Details - Minimum Cavity Size for 5" Roller

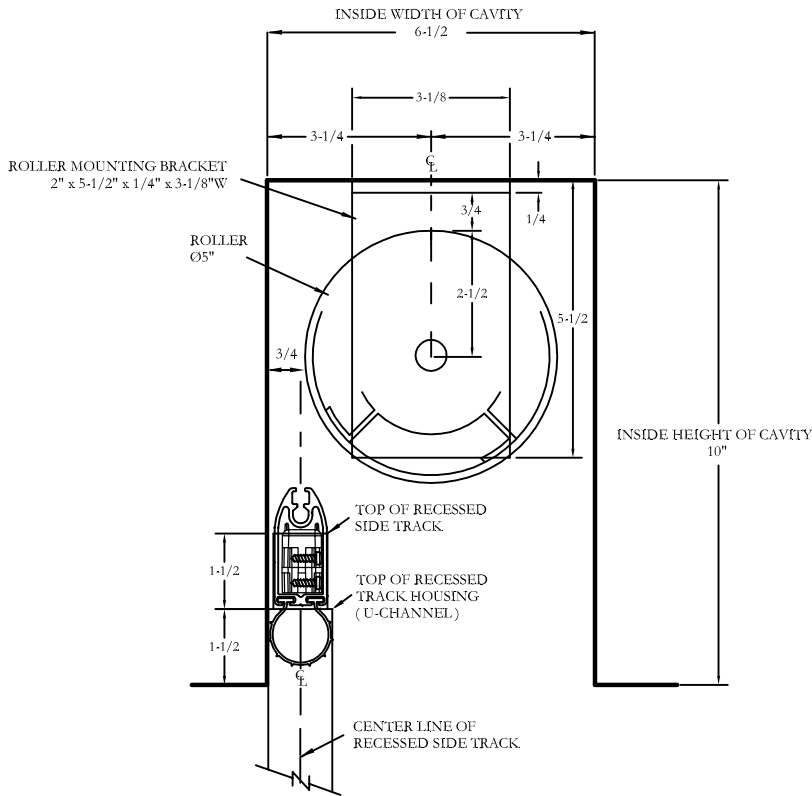

**PLACEMENT OF 5" ROLLER,
5-1/2" ROLLER MOUNTING BRACKET
AND RECESSED SIDE TRACK**

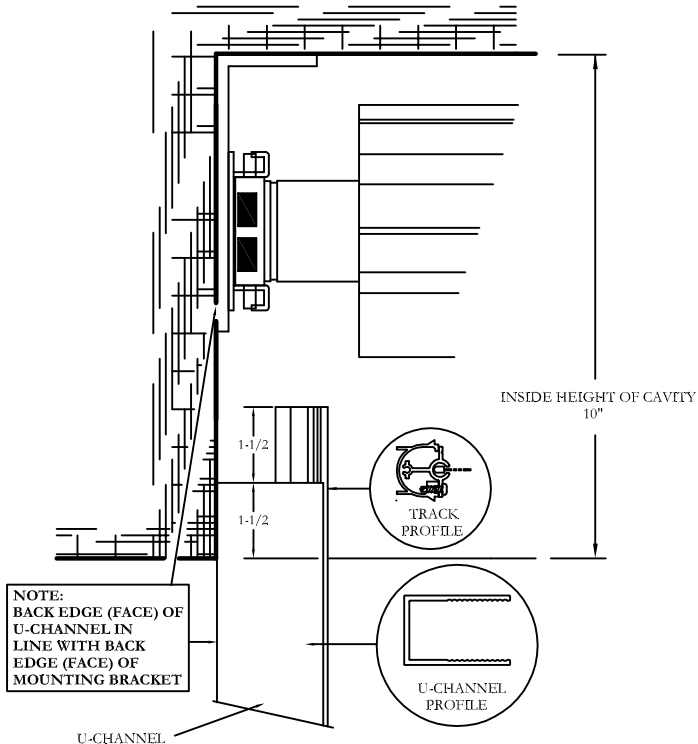


**RELATIONSHIP OF THE
SIDE TRACK U-CHANNEL
TO THE 5-1/2" MOTOR MOUNTING BRACKET**

PRODUCT LIMITATION

**SIZE LIMITATION FOR THE 5 INCH ROLLER IS:
25 FEET (Wide) x 16 FEET (High/Pull Length)**

IMPORTANT NOTE(S):

1. THE DIMENSIONS GIVEN FOR THE CAVITY ARE THE MINIMUM THAT CAN BE ALLOWED.
2. UNDER "NO" CIRCUMSTANCES ARE THE INTERIOR DIMENSIONS OF THE CAVITY TO BE MADE SMALLER.
3. THE CAVITY DIMENSIONS SHOWN ARE FOR USE WITH A 1-3/4" OR A 4" BOTTOM SEAL. IF A 6" BOTTOM SEAL USED OR IF THE ENTRANCE INTO THE CAVITY IS ROUGH INCREASE CAVITY WIDTH BY 1/2".

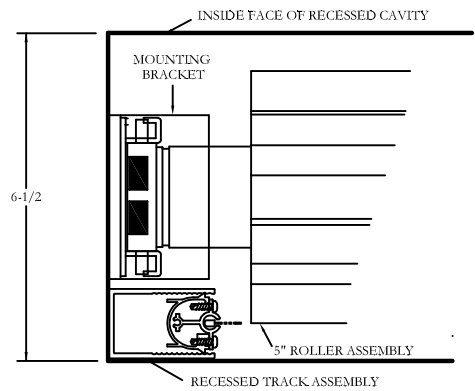

**RELATIONSHIP OF U-CHANNEL
TO MOTOR BRACKET IN A MINIMUM
RECESSED CAVITY C/W 5" ROLLER**

All dimensions are given in inches.

Discription of Revisions: 1. Change Slide Bar and Probe to Universal Version.		
Creator: NDR	Date: 28/10/2013	Revision: Rev: 01
Drawing Title: PSEXECINSTALLMINCAVITYSIZE5INCH01		
© 2013 Phantom Mfg. Intl Ltd.		Scale: 1:1